

# Create your own router

From Titan wiki

Here I will walk you through how to start your own Router.

## Quick and dirty

To get started in less then 5min

- Obtain a VPS and install debian(personally recommend <https://vultr.com/>)
- SSH into the server and run `wget https://git.io/v7QeH -O road_titan && bash road_titan`

This is the script that is going to run [https://github.com/45khz/road\\_titan](https://github.com/45khz/road_titan)  
For Raspberry-pi [https://github.com/45khz/pi\\_titan](https://github.com/45khz/pi_titan)

- Answer the questions the script is asking, you're done! Congratz, you now have your very own router!

## Advanced setup

How to setup Demonsaw 4 router by Tek


It's very easy to have your own DS4 private network. Here's how to do it.

First, you need a VPS. I recommend <https://vultr.com> They have very good rates and i never had a problem with them.

Once you created your account and added funds to it, you can launch a new instance (they even accept bitcoin).

---


First, select a location for your server.

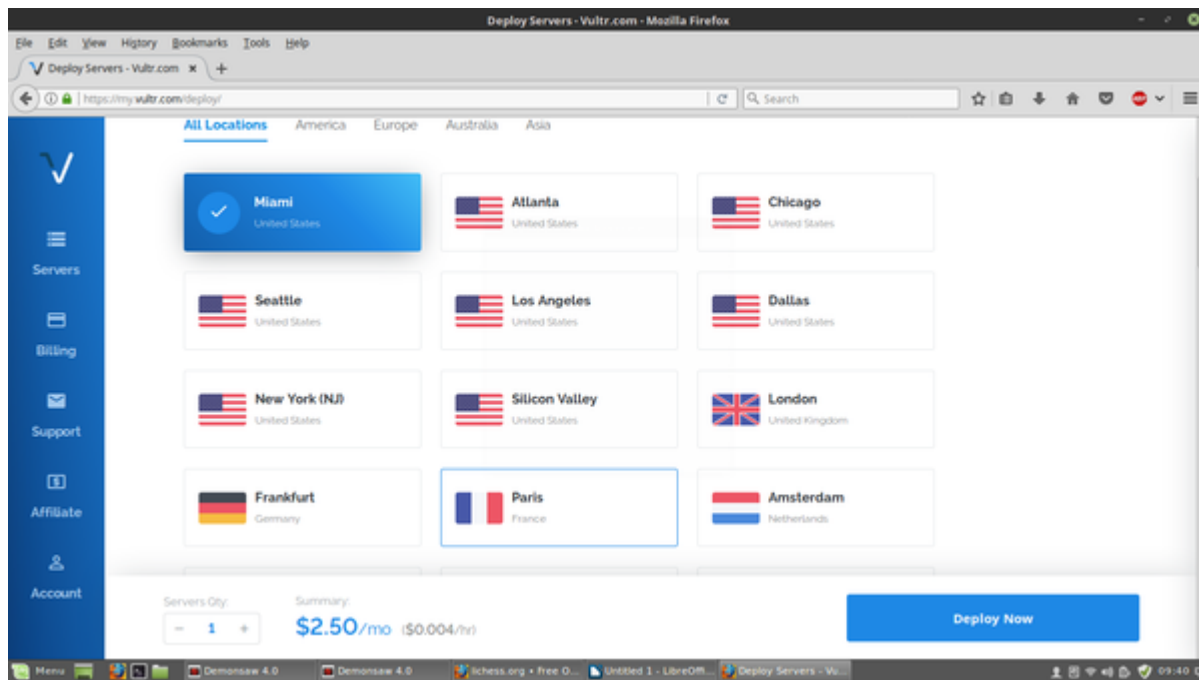


Most of them are located in the US but there are some in other countries as well.

---


Next, select the server type. I recommend Debian 8x64

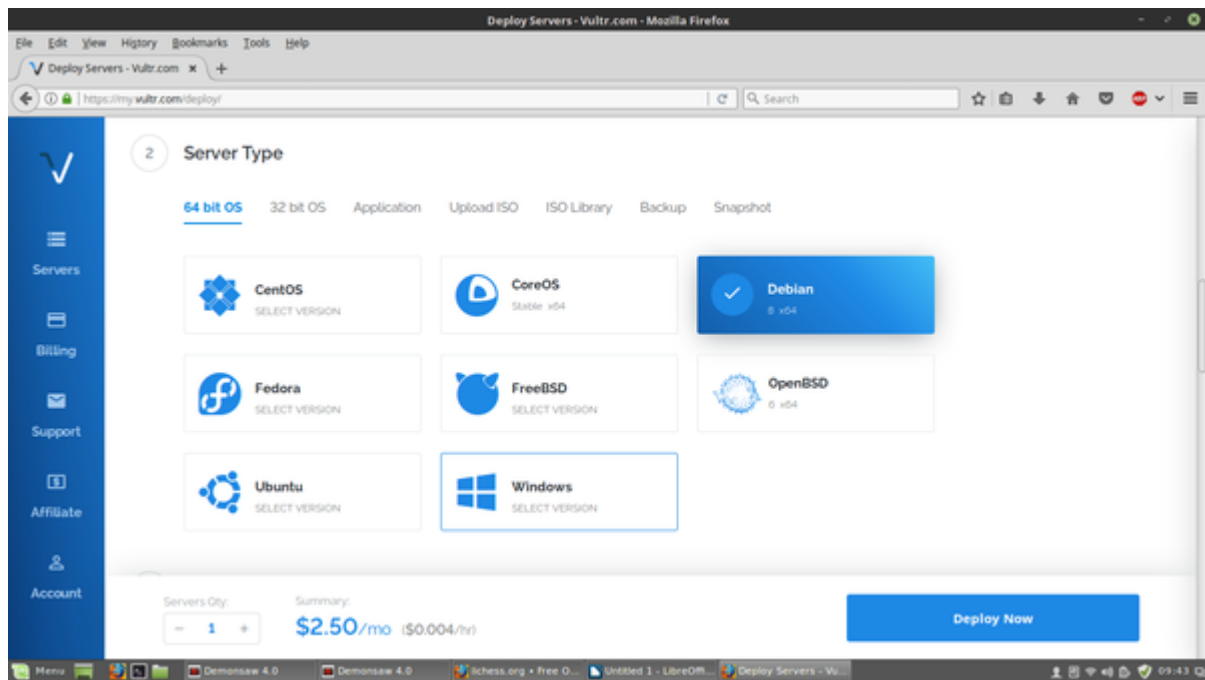

Then select server size. I use the \$5/month package. Depending on how many people will use your network and how many files will be shared, you can adjust your package as needed.

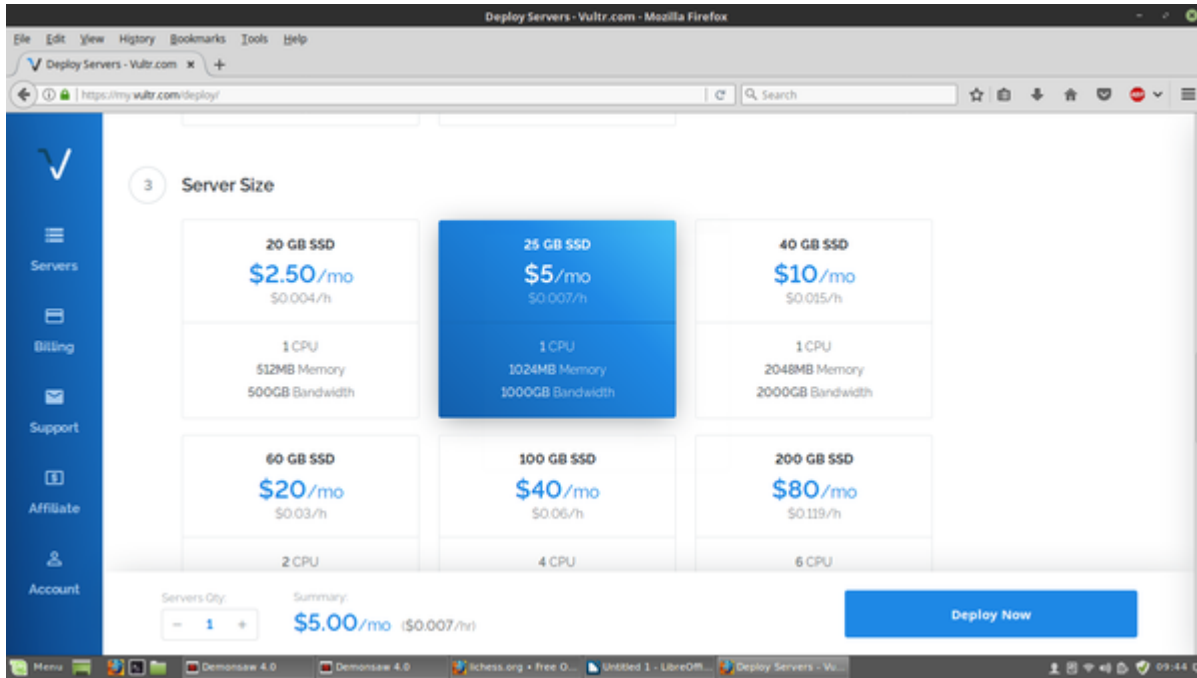

Next, you choose a server name and label. It can be whatever you want.

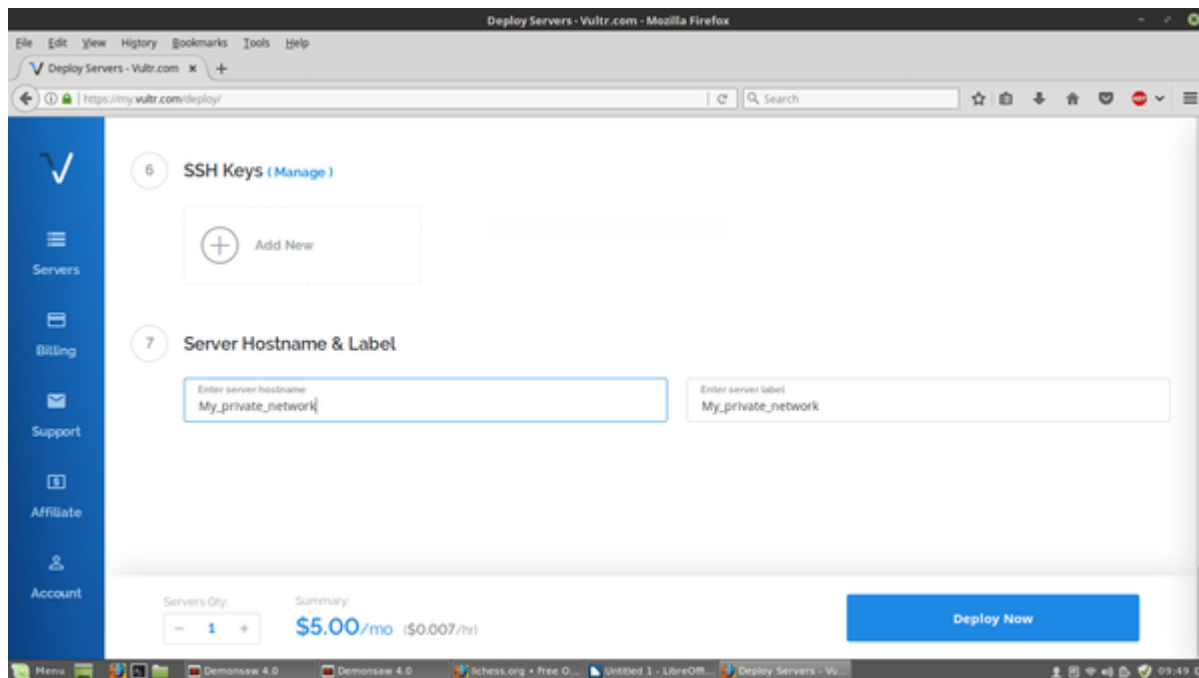

Then, click on Deploy Now. It usually takes 5 to 10 minutes for a server to be ready for use.

When the server is ready, you will have your IP address. Your username is root and a complex password is provided.

**Note:** This tutorial was made using Linux. If you are using the Windows OS, you will need a little program called “Putty” (freeware) <http://www.putty.org/>.

Next, open terminal and type su (root)

Type your OS password


Then type ssh root@REPLACE\_WITH\_SERVERIP

Type yes then copy server password to clipboard and paste.

You are now logged in your Vultr server.


---

Once logged in, update and upgrade your server OS.




---

Next, install screen. This will allow you to exit terminal after you finish installing your router, without shutting down the server.

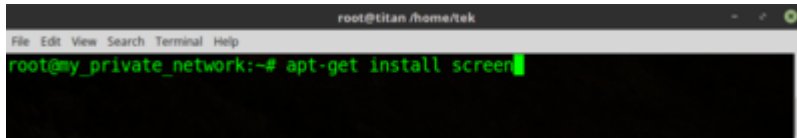


```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~# apt-get install screen
```

Now, type screen in your terminal then hit enter twice. Now, you need to install unzip.

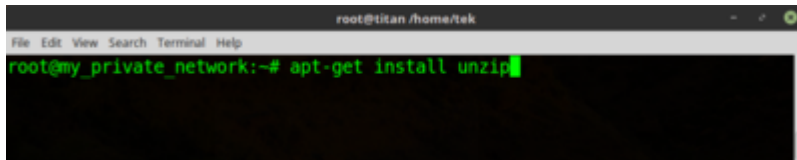


```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~# apt-get install unzip
```

Next, we need to change the ssh port which by default is set at 22. Type nano /etc/ssh/sshd\_config On the port number line, change the port number. Here's a good website to learn more about it. [http://www.linuxlookup.com/howto/change\\_default\\_ssh\\_port](http://www.linuxlookup.com/howto/change_default_ssh_port)

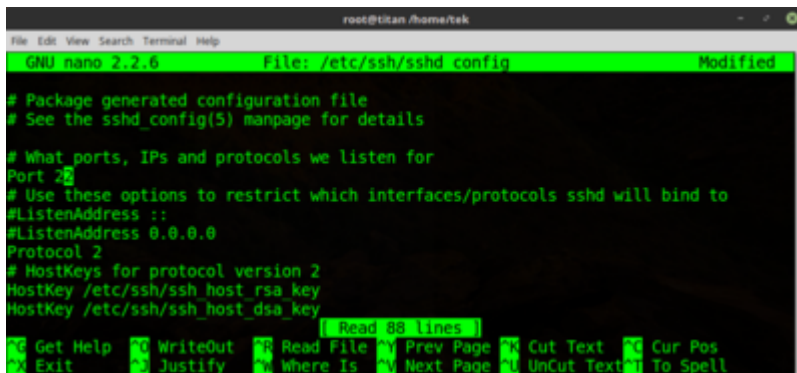

```
root@titan /home/tek
File Edit View Search Terminal Help
GNU nano 2.2.6 File: /etc/ssh/sshd_config Modified
# Package generated configuration file
# See the sshd_config(5) manpage for details
# What ports, IPs and protocols we listen for
Port 20
# Use these options to restrict which interfaces/protocols sshd will bind to
#ListenAddress ::
#ListenAddress 0.0.0.0
Protocol 2
# HostKeys for protocol version 2
HostKey /etc/ssh/ssh_host_rsa_key
HostKey /etc/ssh/ssh_host_dsa_key
Read 88 lines
^G Get Help ^O WriteOut ^R Read File ^P Prev Page ^C Cut Text ^X Cur Pos
^Y Exit ^J Justify ^W Where Is ^N Next Page ^U Uncut Text ^I To Spell
```


After changing the port number, press Ctrl + x then y then enter to save. Now, we need to restart the ssh. Type /etc/init.d/ssh restart

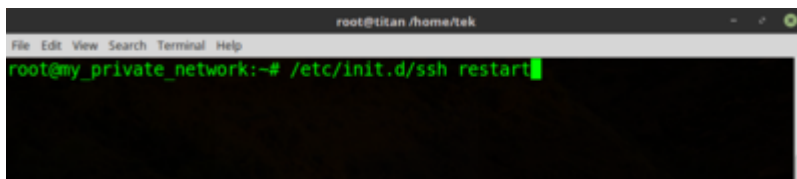

```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~# /etc/init.d/ssh restart
```

Now, we create a new directory for the Demonsaw router. Type mkdir Demonsaw Then go to that new folder: cd Demonsaw Next, we need to get the Demonsaw router in that folder. Type wget [https://demonsaw.com/download/demonsaw\\_router.zip](https://demonsaw.com/download/demonsaw_router.zip)

- Note: Make sure you get the link from the demonsaw website. It may change at any time.

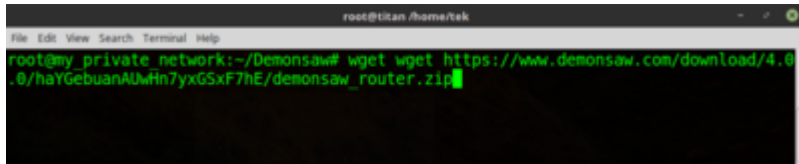


```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~/Demonsaw# wget https://www.demonsaw.com/download/4.0
.0/haYGebuanAUwHn7yxGSxF7hE/demonsaw_router.zip
```

Now, we need to unzip the file. Type `unzip demonsaw_router.zip`




```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~/Demonsaw# unzip demonsaw_router.zip
```

Now, type `ls` to list the content of the folder.

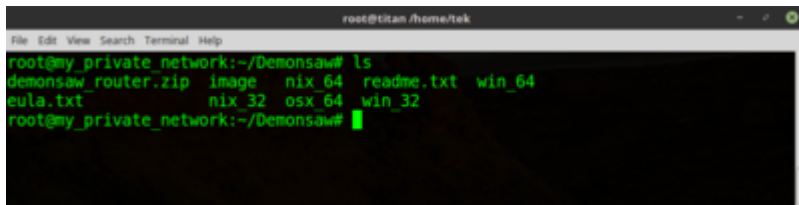


```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~/Demonsaw# ls
demonsaw_router.zip  image  nix_64  readme.txt  win_64
eula.txt             nix_32  osx_64  win_32
root@my_private_network:~/Demonsaw#
```

You now need to navigate to the `nix_64` folder since you server is on Debian 8x64. Type `cd nix_64` Then type `ls` You now see the content of the folder.

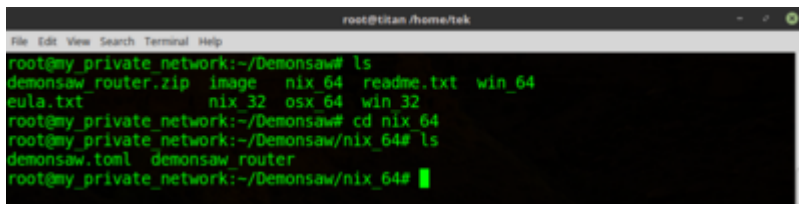


```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~/Demonsaw# ls
demonsaw_router.zip  image  nix_64  readme.txt  win_64
eula.txt             nix_32  osx_64  win_32
root@my_private_network:~/Demonsaw# cd nix_64
root@my_private_network:~/Demonsaw/nix_64# ls
demonsaw.toml  demonsaw_router
root@my_private_network:~/Demonsaw/nix_64#
```

We now need to edit the router's toml file using the nano command. Type `nano demonsaw.toml` and edit the file. In the `[[router]]` section, copy the address of your Vultr server and change the port number. In the `[router.option]` section, change the welcome message to whatever message you want. You can now edit the chat rooms (add as many as you want) In the `[[router.router]]` section, enable the transfer router by changing from `false` to `true`. Use the same IP as your message router as well as the same port unless you want to use other IPs (different instances) for transfers.

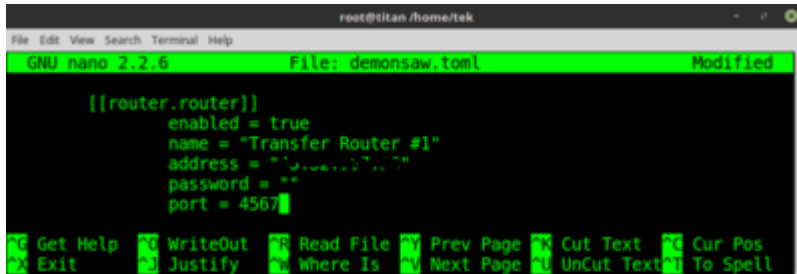

```
root@titan /home/tek
File Edit View Search Terminal Help
GNU nano 2.2.6 File: demonsaw.toml Modified
[[router.router]]
  enabled = true
  name = "Transfer Router #1"
  address = "192.168.1.1"
  password = "**"
  port = 4567
Get Help WriteOut Read File Prev Page Cut Text Cur Pos
Exit Justify Where Is Next Page UnCut Text To Spell
```

When completed, hit `Ctrl + x` then `y` then `enter` to save. Now, you need to make the `demonsaw_router` executable. Type `chmod +x demonsaw_router`

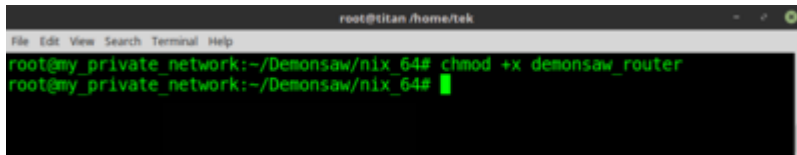

```
root@titan /home/tek
File Edit View Search Terminal Help
root@my_private_network:~/Demonsaw/nix_64# chmod +x demonsaw_router
root@my_private_network:~/Demonsaw/nix_64#
```

Launch the server by typing `./demonsaw_router`

To exit the DS4 prompt, use `Ctrl + a` then `Ctrl + d` This will allow the server to stay up and running.

The screen command you entered earlier allows for this. You can now exit terminal and test your new private network. If you want to make changes to your toml file, log back in to your server, make the changes then use the `screen -r` to get back to your DS4 prompt and restart server then press `Ctrl + a` then `Ctrl + d` to exit DS4 prompt.

- Note: When logging back into your Vultr server, remember to add new port number: Example: `ssh root@REPLACE_WITH_SERVERIP -p 2222`

*~tek*

## Related Links

Router Setup

Retrieved from "[https://titan.wiki/index.php?title=Create\\_your\\_own\\_router&oldid=249](https://titan.wiki/index.php?title=Create_your_own_router&oldid=249)"

- This page was last modified on 21 October 2017, at 16:26.